

Size	Rim width	Profile					Dimensions		Load capacity (kg)					
		ETRT0	XP	LG	L	Elite XP	Elite XP Loc	Max.	Overall	Forklift up to 25 km/h		Other vehicles (trailers)		
								width (mm)	diam (mm)	load wheel	steer wheel	6 km/h	10 km/h	25 km/h
3.00 - 4	2.10 - 4	■	●			x		84	250	260	195	260	235	195
	2.50C - 4		●			x		84	250	260	195	260	235	195
4.00 - 4	2.50C - 4	■	●			x		93	306	535	410	535	485	410
4.00 - 8	3.00D - 8	■	●	●		x	x	104	406	950	730	950	860	730
5.00 - 8	3.00D - 8	■	●			x	x	122	457	1415	1090	1415	1285	1090
15x4 1/2 - 8	3.00D - 8		●	●		x	x	118	377	1040	800	1040	940	800
16x6 - 8	4.33R - 8	■	●			x	x	152	411	1455	1120	1455	1320	1120
18x7 - 8	4.33R - 8	■	●		●	x	x	158	456	2145	1650	2145	1950	1650
6.00 - 9	4.00E - 9	■	●			x	x	141	524	1885	1450	1885	1710	1450
140/55 - 9	4.00E - 9	■	●			x	x	132	380	1170	900	1170	1060	900
21x8 - 9	6.00E - 9	■	●			x	x	186	516	2755	2120	2755	2505	2120
6.50 - 10	5.00F - 10	■	●			x	x	160	574	2340	1800	2340	2125	1800
23x9 - 10	6.50F - 10	■	●			x	x	200	583	3445	2650	3445	3125	2650
200/50 - 10	6.50F - 10	■	●			x	x	197	456	2470	1900	2470	2240	1900
7.00 - 12	5.00S - 12	■	●		●	x	x	171	650	2920	2240	2920	2640	2240
23x10 - 12	8.00G - 12	■	●			x	x	240	583	3770	2900	3770	3420	2900
27x10 - 12	8.00G - 12	■	●			x	x	240	676	3900	3000	3900	3540	3000
23x5	3.75P - 13	■	●			x	x	138	617	1495	1150	1495	1355	1150
5.50 - 15	4.50 - 15		●			x		143	664	2195	1625	2155	1870	1495
6.00 - 15	4.50 - 15		●			x		150	693	2455	1820	2435	2095	1675
7.00 - 15	5.50 - 15	■	●			x	x	180	730	3545	2725	3545	3215	2725
7.50 - 15	5.50 - 15		●			x		194	744	3900	3000	3900	3540	3000
	6.00 - 15	■	●			x		194	744	3900	3000	3900	3540	3000
	6.50 - 15		●			x		194	744	3900	3000	3900	3540	3000
8.25 - 15	5.50 - 15		●			x		208	806	4530	3485	4530	4110	3485
	6.50 - 15	■	●			x	x	208	806	4750	3650	4750	4300	3650
28x9 - 15	7.00 - 15	■	●			x	x	225	692	3900	3000	3900	3540	3000
(8.15 - 15)														
28x12 1/2 - 15	9.75 - 15	■	●			x	x	284	710	5525	4250	5525	5015	4250
250 - 15	7.00 - 15	■	●			x	x	225	709	4640	3570	4640	4200	3570
	7.50 - 15		●			x	x	236	709	4640	3570	4640	4200	3570
300 - 15	8.00 - 15	■	●			x	x	255	812	5850	4500	5850	5310	4500
355/65 - 15	9.75 - 15	■	●			x	x	284	812	7800	6000	7800	6430	6000
7.50 - 16	6.00F 16		●			x		204	752	3950	3050	3950	3600	3050
9.00 - 20	6.50 - 20	■	●			x		220	974	5400	4500	5400	4910	4500
	7.00 - 20	■	●			x		220	974	5400	4500	5400	4910	4500
10.00 - 20	7.50 - 20	■	●		●	x		250	1009	6000	5000	6000	5455	5000
	8.00 - 20	■	●			x		250	1009	6000	5000	6000	5455	5000
11.00 - 20	8.00 - 20	■	●			x		260	1040	6540	5450	6540	5925	5450
12.00 - 20	8.00 - 20	■	●		●	x		260	1090	7560	6300	7560	6870	6300
	8.50 - 20	■	●			x		260	1090	7560	6300	7560	6870	6300
	10.00 - 20	■	●			x		313	1090	7800	6500	7800	7100	6500
355/50 - 20	10.00 - 20	■			●	x	x	307	828	8990	6915	8990	8160	6915
12.00 - 24	8.50 - 24	■	●			x		295	1178	8040	6700	8040	7300	6700
	10.00 - 24	■	●			x		295	1178	8280	6900	8280	7530	6900
14.00 - 24	10.00 - 24	■	●			x		326	1318	11100	9250	11100	10100	9250
16.00 - 25	11.25 - 25		●			x		410	1442	15000	12500	15000	13600	12500


AVAILABLE TREAD PATTERNS



XP



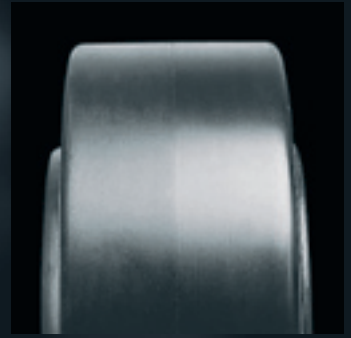


LG




L

AVAILABLE COMPOUNDS


-  **NON MARKING** - White compound eliminating black tire marks on any surface. High performance tire.
-  **ELCON** - Prevents electric shock and sparks. Required in explosive environments where static electricity build-up is a concern.
-  **HIGH LOAD** - A two-stage tire with excellent performance in high load circumstances. Good ride quality and reduced heat build up.

AVAILABLE ON REQUEST

-  **CUT RESISTANT** - Very efficient on rough, jagged surfaces. Prevents chunking and sidewall damage.

RESILIENT SIZES AND DIMENSIONS

For Resilient tires there are four different size designations

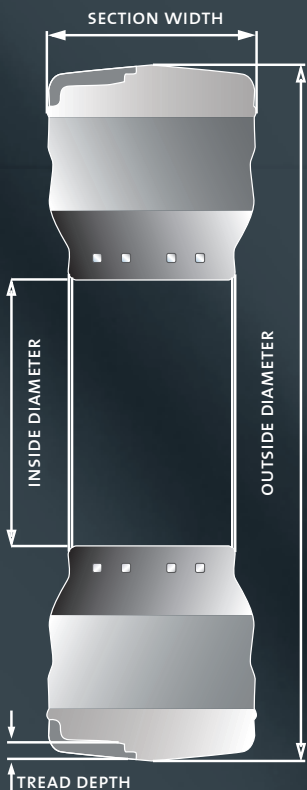

5.00	-	8
section width		nominal wheel diameter
inch		inch

250	-	15
section width		nominal wheel diameter
mm		inch

18	x	7	-	8
outside diameter		section width		nominal wheel diameter
inch		inch		inch

200	/	50	-	10
section width		aspect ratio		nominal wheel diameter
mm		%		inch